

YOUR HOME. BUILT WITH CERTAINTY.

Complete Turnkey Construction Specifications

From foundation to final finishes, **Lokah Builders and Developers Private Limited** brings every stage of construction together through one professionally managed process.

Strong Foundations • Quality Materials • Skilled Execution • Transparent Delivery

Project
Client
Location
Prepared by Lokah Builders & Developers Pvt Ltd



THE TURNKEY PROMISE

ONE TEAM. EVERY STAGE. COMPLETE ACCOUNTABILITY.

Our turnkey construction service is designed to give the client a clear, coordinated and dependable building experience. We manage the essential civil, structural, electrical, plumbing and finishing works defined in this specification—from initial excavation through final painting.

OUR COMMITMENT

● STRUCTURAL DISCIPLINE

Execution in accordance with approved architectural and structural drawings.

● PROFESSIONAL EXECUTION

Skilled labour, proper construction methods, supervision and stage-wise quality control.

● CLIENT CHOICE

Freedom to select colours, designs and brands within the stated material allowances.

● QUALITY-LED MATERIALS

Specified-grade materials and recognised brands selected for dependable performance.

● TRANSPARENT COSTING

Clearly defined allowances, inclusions, upgrades and exclusions to support informed decisions.

SCOPE AT A GLANCE

Earthwork & Foundation • RCC Structure • Masonry & Plastering • Joinery • Electrical • Plumbing & Sanitary • Flooring & Tiling • Painting & Finishes • Protection Works

STRENGTH BEGINS BELOW.

Every lasting structure begins with careful site preparation and a properly executed foundation system.

01



EARTHWORK EXCAVATION

Excavation for foundation trenches shall be carried out in all classes of soil, including the required cutting, shoring, strutting and dewatering.

- Column foundation: **120 × 120 × 120 cm**
- Rubble foundation: **60 × 60 cm**
- Final execution shall follow the approved structural and architectural drawings.


02



RR FOUNDATION

Random rubble foundation of **60 × 60 cm**, properly fitted and packed with available soil in accordance with standard construction practice.


03



RR BASEMENT

Random rubble basement of **50 × 45 cm**, fitted and packed in cement mortar at a **1:6 ratio**, subject to approved structural and architectural requirements.

04



RCC BELT

Controlled reinforced cement concrete belt using **20 mm downsize aggregate** and **M20-grade concrete**, including formwork, centering, shuttering, scaffolding, mechanical compaction, curing and surface preparation wherever required.

- Indicative belt size: **45 × 10 cm**
- Final dimensions: As per approved design

05



BASEMENT FILLING

Basement filling shall be completed using good-quality red earth or quarry/slurry dust. All layers shall be adequately watered and mechanically compacted to achieve a stable base.

ANTI-TERMITE PROTECTION

Pre-construction chemical treatment against subterranean termites shall be carried out by experienced applicators to achieve proper penetration and uniform coverage.

ENGINEERED FOR ENDURING STRENGTH.

The reinforced concrete framework shall be executed with controlled materials, proper formwork and disciplined site practices.

RCC WORKS COVERED

- Column footing for the porch area
- Structural columns
- Beams
- Roof slabs
- Staircases
- Sunshades

CONCRETE STANDARD

M20

GRADE CONCRETE

20 mm

DOWNSIZE AGGREGATE

RCC elements shall use M20-grade concrete with 20 mm downsize aggregate, executed in accordance with approved structural and architectural specifications.

The work includes:

- Formwork, centering and shuttering
- Scaffolding at required levels
- Machine mixing and controlled pouring
- Mechanical vibration for proper compaction
- Curing and surface hacking wherever required

REINFORCEMENT STEEL

Fe 500

HIGH-YIELD STRENGTH

High-Yield Strength Deformed steel bars conforming to Fe 500 shall be used for RCC works. The scope includes transporting, straightening, cutting, bending, positioning and binding with approved-gauge binding wire.

Preferred brands:

Metcon / Tulsyani / Kairali / Agni / Tata Steel, or an approved equivalent.

PCC BELOW FLOORING

1:4:8

Plain Cement Concrete in a 1:4:8 mix, using 20 mm graded aggregate, shall be laid beneath flooring in accordance with standard specifications.

PARAPET WORK

Parapet walls shall be constructed using single-brick masonry, subject to approved drawings and site requirements.

BUILT WITH THE RIGHT MATERIALS.

Carefully selected materials and consistent workmanship create walls and surfaces that perform well and finish beautifully.

WALL CONSTRUCTION

External and internal masonry shall use good-quality solid concrete blocks or laterite stone in **20 cm thickness**, laid in **1:6** cement mortar, as applicable to the approved plan.

OPTIONAL UPGRADE

Good-quality semi wire-cut red brick may be selected instead of solid blocks or laterite at an additional

₹75 per sq. ft.



CEMENT

43-grade Ordinary Portland Cement or Portland Pozzolana Cement shall be used as appropriate to the work.

Preferred brands:

Shankar / Ramco / ACC / Zuari, or an approved equivalent.

SAND

- Good-quality crushed **M-sand** for RCC and superstructure works
- Properly graded **P-sand** for plastering works

PLASTERING STANDARDS

Ceiling Plastering

1:3 cement mortar, up to **10 mm** thick.

Internal Wall Plastering

1:6 cement mortar, approximately **9–12 mm** thick.

External Wall Plastering

1:5 cement mortar, approximately **12–15 mm** thick.

QUALITY APPROACH

Mortar proportioning, surface preparation, alignment, curing and finishing shall be monitored throughout execution to support strength, consistency and a clean final finish.

CRAFTED DETAILS. LASTING IMPRESSIONS.

Joinery brings warmth, security and character to the completed home.
All timber shall be selected for quality, suitability and finish.

01

WINDOW FRAMES

Good-quality Anjili, Plavu or Cheru Teak shall be used for window frames. Frames shall be securely anchored using 6 mm flats and 12 mm rods.

02

DOOR FRAMES & SHUTTERS

Good-quality Anjili, Plavu or Cheru Teak shall be used for standard door frames and panelled shutters.

- Standard door frame section: **95 × 60 mm**
- Main entrance: Teakwood frame with an enhanced profile, as per approved design
- Kitchen door: Timber construction with a lower solid panel and upper etched/decorative glass panel

03

BATHROOM VENTILATORS

Good-quality Anjili timber shall be used for bathroom ventilator frames and glazed shutters. Frames shall be secured using 6 mm flats and 12 mm rods.

04

BATHROOM DOORS

Branded fibre doors shall be provided for bathrooms.

- Client-selected design, colour and approved brand
- Material allowance: **₹4,500 per door**

05

WOODEN HARDWARE

Door and window hinges, hooks, eyes, tower bolts, mortise locks and related fittings shall be sourced from recognised brands with a stainless-steel matte finish.

- Main door lock allowance: **₹3,000 per door**
- Other door lock allowance: **₹1,000 per door**

06

WOODEN POLISH

Exposed wooden surfaces shall receive proper preparation, sealer, wood stain and a clear melamine finish coat for protection and a refined appearance.



POWERED FOR MODERN LIVING.

The electrical system shall be planned for daily convenience, reliable protection and future-ready functionality.

WIRING & COMPONENTS

Cables	Cables Guard / Finolex / Havells / RR Kabel, or approved equivalent
Switches, Sockets & Metal Boxes	Legrand / Havells, or approved equivalent
Distribution Board	Havells / Legrand
Protection	Branded ELCBs and MCBs

SYSTEM PROVISIONS

- 01 Three-phase electrical wiring
- 02 Inverter wiring provision in all rooms
- 03 Distribution board with suitable circuit protection
- 04 Concealed conduiting and boxes as required by the approved electrical layout

ELECTRICAL POINTS


The number and placement of light points, fan points, sockets, power outlets and appliance points shall be finalised after approval of the floor plan, furniture layout and elevation design.

CLIENT-SUPPLIED FINAL FITTINGS

Decorative light fixtures, fancy lighting and ceiling fans are to be selected and supplied by the client unless specifically added to the final agreement.

SAFETY & EXECUTION

Wiring routes, circuit distribution, load planning and protective devices shall be installed and tested using accepted electrical practices.

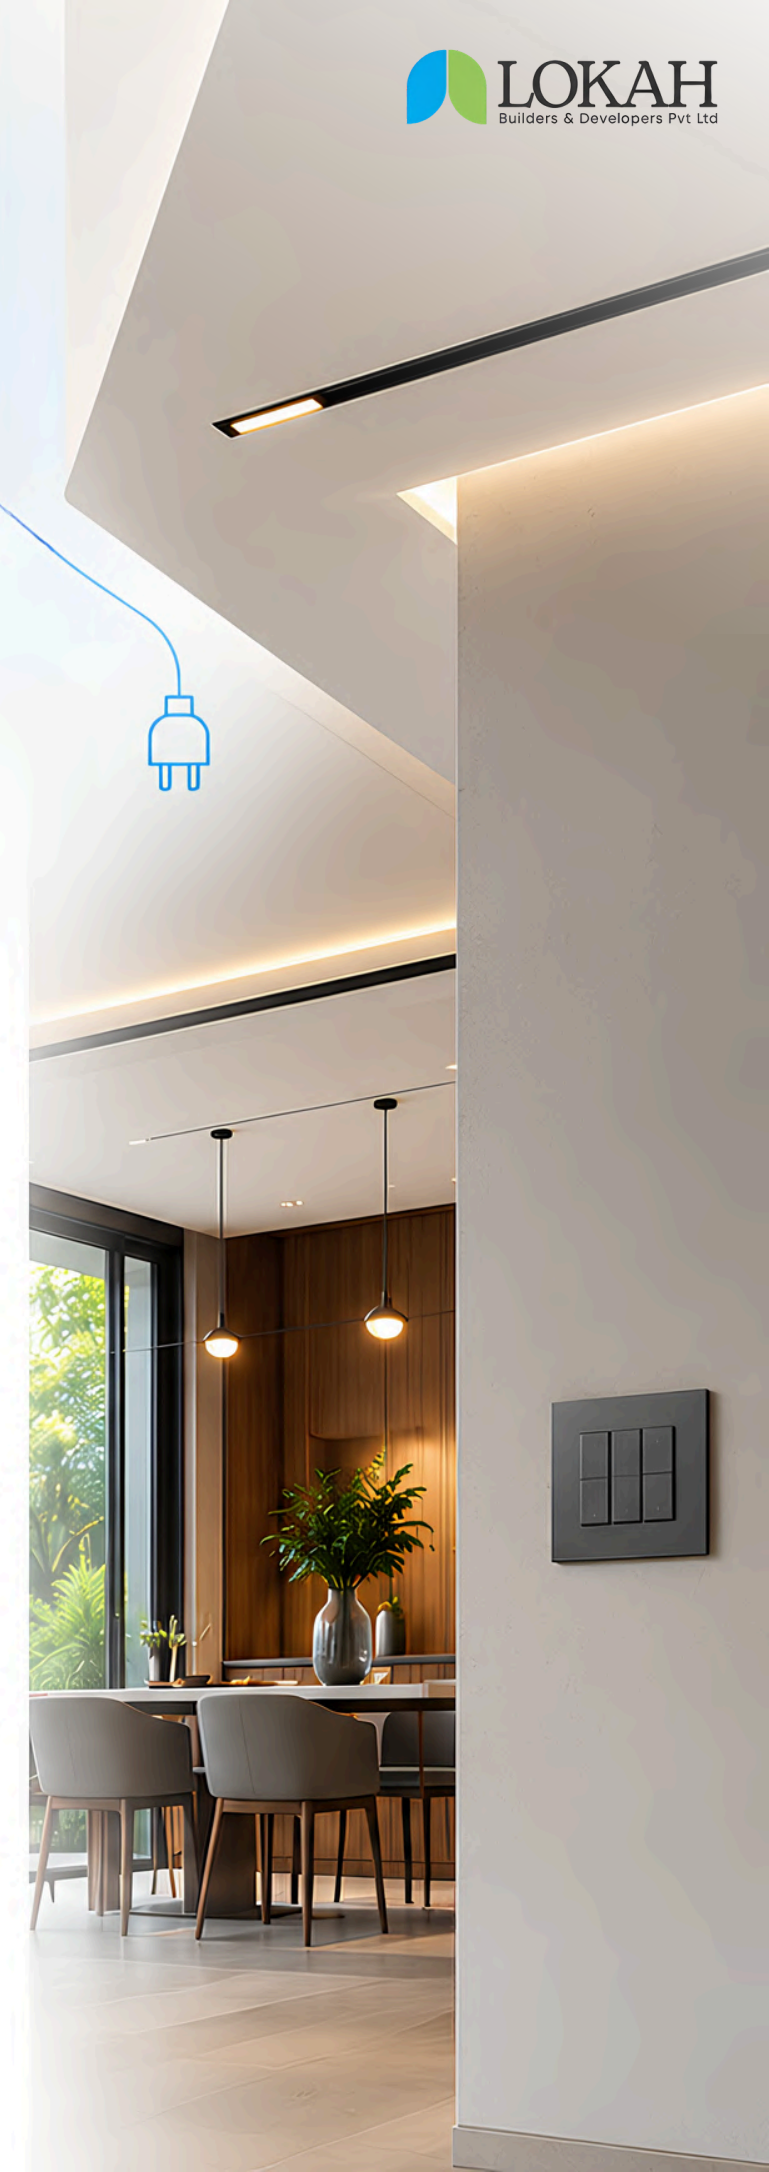

DESIGNED FOR EVERYDAY RELIABILITY.

The plumbing and sanitary scope combines dependable piping with client-selected fixtures within clearly stated allowances.



PIPING

PVC pipes shall be from Supreme / Thomson / Kelachandra, or an approved equivalent.



CP FITTINGS

CP fittings shall be selected from Hindware / Cera / TOTO / Jaquar, or an approved equivalent.

CP FITTINGS

Fixture	Allowance
Wall mixer	₹3,000
Long-body tap	₹600
Health faucet	₹750
Angle valve	₹400
Shower set	₹1,000
Bathroom pillar tap	₹600
Hall/dining pillar tap	₹1,200
Sink tap	₹1,250

SANITARYWARE & SINKS

Item	Specification / Allowance
WC	Cera one-piece EWC — ₹9,000 per unit
Bathroom wash basin	Cera half-pedestal basin — ₹4,000 per unit
Dining wash basin	Cera basin — ₹4,000 per unit
Kitchen sink	24 × 18 in — ₹5,500
Work-area sink	18 × 16 in — ₹3,500



WATER STORAGE

One **1,000-litre** Aqua-Tech, Sintex or equivalent-quality water tank shall be provided.



WASTE MANAGEMENT

The septic tank and wastewater soak pits shall be constructed to a suitable standard size and capacity, based on approved site conditions and requirements.



FINISHED TO PROTECT. DETAILED TO IMPRESS.

The finishing stage brings together appearance, weather protection and long-term usability.



SLOPED ROOF TILES

Good-quality imported ceramic roofing tiles or terracotta Mangalore-pattern tiles shall be used for sloped roof areas.

- Client-selected design, colour and approved brand
- Allowance: **₹50 per sq. ft.**



ELEVATION DETAILS

Cement-based ornamental features shall be executed in accordance with the approved elevation design.



PUTTY WORK

Wall putty shall be applied to all internal areas and the external front-elevation areas using Asian / Birla / JK Wall Putty, or approved equivalent.



PAINTING SYSTEM

All plastered surfaces shall receive the required surface preparation and a suitable white-cement wash where applicable.

Internal Walls

One coat of cement primer followed by two coats of Asian Paints / Berger standard acrylic emulsion, or approved equivalent.

External Walls

One coat of appropriate primer followed by two coats of Asian Paints / Berger exterior weather-protection coating, or approved equivalent.



STAIRCASE HANDRAIL

Stainless-steel handrails shall be provided in the staircase area.

- Allowance: **₹2,300 per running metre**



SITE PROTECTION ELEMENTS

The scope also includes standard septic and soak-pit works and anti-termite treatment as described in this specification.

CLEAR CHOICES. NO SURPRISES.

Transparent scope definition helps the client make confident decisions and protects both parties throughout the project.

OPTIONAL ADDITIONS



Semi Wire-Cut Red Brick Upgrade

Available in place of solid block or laterite masonry at an additional

₹75 per sq. ft.



Smokeless Oven / Aluva Aduppu

A good-quality smokeless oven may be installed in the work area or fire kitchen at an additional

₹10,500

ITEMS NOT INCLUDED IN THE BASE QUOTATION

- Loose or built-in furniture
- Window curtains and curtain accessories
- False-ceiling works
- Kitchen cupboards and cabinetry
- Bedroom wardrobes
- Crockery shelves
- Wet-and-dry bathroom partitions
- Bathroom accessories beyond the stated sanitary scope
- CCTV/security-camera conduiting
- Decorative interior lighting
- Interior decoration works
- Landscaping and garden works
- Well construction
- Pavement, walkway and driveway tiling
- MS/GI step ladders
- Compound walls and gates

FOR A CLEARER UNDERSTANDING

Any excluded item can be estimated and added separately upon the client's request.



MATERIAL SELECTION ADJUSTMENTS

If the client selects a product below the stated allowance, the difference shall be credited. If the selected product exceeds the allowance, the difference shall be payable by the client.



SPECIFICATION CHANGES

Any requested modification to materials, dimensions, brands, designs or scope may result in a corresponding increase or decrease in the final quoted amount.



BUILT ON QUALITY. DELIVERED WITH TRANSPARENCY.

Our objective is to create a well-built home through responsible material selection, structured execution and clear communication at every stage.



WHAT THE QUOTED RATE COVERS

Unless otherwise stated, the agreed rates include:

- Specified construction materials
- Transportation and conveyance
- Loading and unloading at site
- Labour charges
- Work supervision

There shall be no undisclosed construction charges within the agreed base scope. Variations requested by the client or required due to approved specification changes shall be documented separately.



TAXES

GST at the rate applicable at the time of billing shall be charged in addition to the quoted amount, unless expressly stated otherwise in the commercial proposal.



PAYMENT TERMS

Stage-wise payment terms shall be finalised by mutual agreement between the client and **Lokah Builders and Developers**, aligned with project progress and the signed contract.



IMPORTANT CONFIRMATION

All dimensions, quantities, point schedules, product models and final brands are subject to approved drawings, site conditions, stock availability and the signed agreement. Where a preferred brand is unavailable, an equivalent product may be proposed for client approval.

LET'S BUILD WITH CONFIDENCE.

